


# Wiring Harness Kit (TK95051)



A dedicated wiring harness connects the TKV 20 to your tractor. Included is a rocker switch with a ROPS-mounted bracket to operate the electric actuator. This wiring harness connects a TKV 20 to Kubota BX2380 and BX2680 Sub-Compact Tractors.

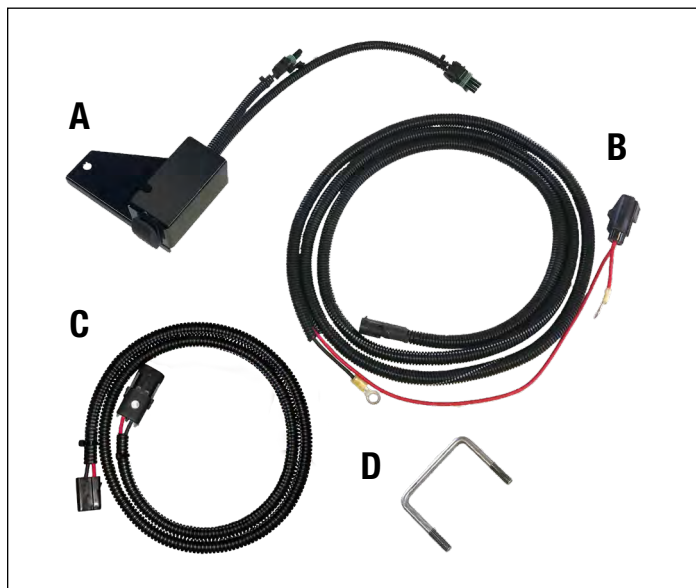

## Kit Includes

	Description	Qty.
A	Switch Bracket with Rocker Switch	1
B	Wire Harness	1
C	Extension Harness	1
D	U-Bolt	1
E	5/16" Nylon Lock Nut	2
F	Zip Ties	10

## Installation Instructions

**NOTE: IT IS RECOMMENDED THAT THE MOWER DECK IS DISCONNECTED FROM THE TRACTOR TO MAKE INSTALLATION OF THIS WIRING HARNESS EASIER.**

**BE SURE THAT YOUR TRACTOR IS IN PARK AND THAT YOU'VE GIVEN THE ENGINE SUFFICIENT TIME TO COOL, IF PREVIOUSLY IN USE.**


1. Remove the battery cover and connect the wire terminals to the battery (red to positive, black to negative).



2. Open the tractor's hood. The Wiring Harness should follow the existing wires forward, down through the opening at the left side covered by the rearmost portion of the hood.



3. Under the tractor, follow wiring toward the rear of the tractor and thread it up through the opening located at the front left side of the tractor seat.

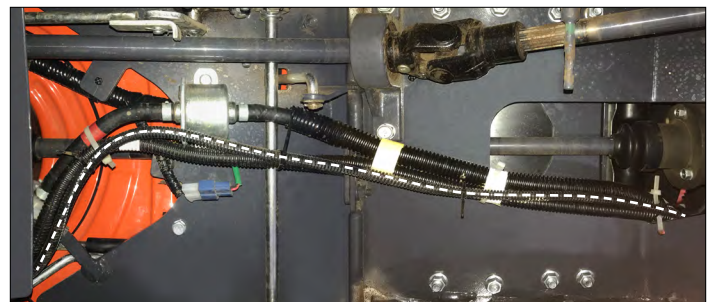


- Lift the seat. Route the Wiring Harness alongside the existing wiring towards the rear of the seat and then back under the rear fender.



- The harness then follows the tractor's existing wires across the rear of the tractor and up the ROPS on the right side.



- Attach Switch Bracket (A) to the right side of the ROPS. Position this bracket at a height that's comfortable for you to reach the rocker switch and high enough to avoid interference with your arm while using the tractor's armrest. Secure this bracket with the U-Bolt (D) and the two 5/16" Nylon Lock Nuts (E).

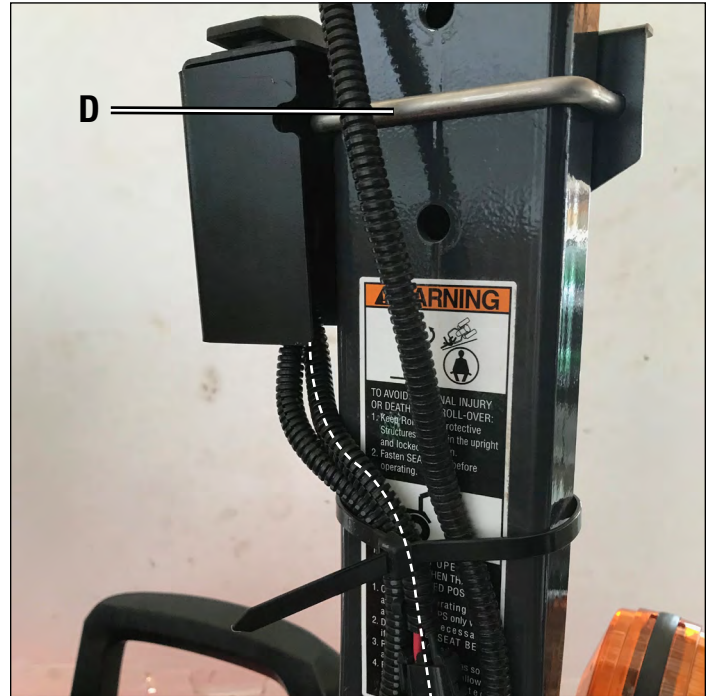

- Use the Zip Ties (F) to secure the Wiring Harness to the tractor's existing wiring. Apply these to areas to prevent wires from hanging too low and/or making contact with moving parts.

## Warranty

TerraKing's products are guaranteed to be free from defects in material and/or workmanship and to perform as advertised when properly assembled, installed, used, and maintained in accordance with written instructions. Failure to adhere to this will void the warranty. TerraKing will not be responsible for labor, loss, or consequential damage of any kind or character caused by defective parts, or for charges incurred in the replacement or repair of defective parts. TerraKing reserves the right to request photos or return of damaged/defective parts. To submit a claim, please have your original purchase date and a copy of your receipt (if available).

## Warranty Period

The TerraKing Wirng Harness Kit is warranted for a period of 1 (one) year after the purchase date for residential use, and 6 (six) months after the purchase date for commercial use. This product is warranted by TerraKing to the original purchaser/customer against defects in material and workmanship under normal operating conditions.

TerraKing by Superior Tech, Inc.  
717-286-1444  
sales@terraking.com  
Form # TKMI-006B-08/18