

| REF | QTY | PART NO | DESCRIPTION | REF | QTY | PART NO | DESCRIPTION |
|-----|-----|-----------|----------------------------|-----|-----|-----------|-------------------------------|
| 1 | 1 | 45433 | HOPPER, 85# BROADCAST | 22 | 1 | 43093 | PIN, COTTER 1/8 X 1-1/2 |
| 2 | 1 | 23753 | BRACKET, GATE SLIDE ANGLE | 23 | 1 | 43848 | GRIP, CONTROL ARM |
| 3 | 2 | C-9M5732 | RIVET, POP 3/16 | 24 | 1 | 47141 | NUT, WING 1/4-20 NYLON |
| 4 | 1 | 2-118 | BRACKET, SLIDE GATE | 25 | 1 | 44950 | BOLT, CARRIAGE .25-20 X .75 |
| 5 | 2 | 43661 | BOLT, HEX .25-20 X 1 | 26 | 1 | 48934 | HAIRPIN, AGITATOR |
| 6 | 14 | 47189 | NUT, HEX 1/4-20 NYLOC | 27 | 1 | 43648 | BOLT, HEX 1/4-20 X 1-1/2 |
| 7 | 10 | 43088 | WASHER, .312 X .734 X .065 | 28 | 2 | 49449 | PLUG, 1"OD TUBE |
| 8 | 1 | 44566 | SPRING, TORSION | 29 | 1 | 45428 | FLOW PLATE (ROD CONTROL) |
| 9 | 1 | 6-1057GY1 | ASS'Y, FRAME | 30 | 2 | 47963 | BEARING, HEX FLANGE .50 ID |
| 10 | 1 | 2-110GY1 | TUBE, HITCH | 31 | 3 | R19171616 | WASHER, .531 X 1 X .059 |
| 11 | 1 | 69209 | ASS'Y, GEARBOX | 32 | 2 | 45705 | SPACER, PLASTIC EXTRUSION |
| 12 | 1 | 45504 | IMPELLER | 33 | 1 | 43182 | BOLT, HEX 5/16-18 X 3/4 |
| 13 | 1 | 28611 | AXLE, 1/2" OD HOLLOW | 34 | 1 | 47810 | NUT, HEX .312-18 NYLOC |
| 14 | 1 | 28712BL1 | FLOW CONTROL MOUNT | 35 | 1 | 46053 | SPACER, .280ID X .500OD X .95 |
| 15 | 2 | 28711BL1 | ARM, FLOW CONTROL | 36 | 1 | 47623 | PIN, HITCH 3/8 X 3 |
| 16 | 1 | 42347 | SPRING, TORSION | 37 | 1 | 43343 | PIN, HAIR COTTER 3/32 |
| 17 | 2 | 45702G | WHEEL & TIRE ASSEMBLY | 38 | 1 | 40883 | COVER, HOPPER |
| 18 | 10 | 1509-69 | BOLT, HEX 1/4-20 X 1-3/4 | 39 | 1 | 24858 | STOP, FLOW CONTROL |
| 19 | 1 | 1543-69 | WASHER, NYLON | 40 | 2 | 24446BL1 | BRACKET, HITCH |
| 20 | 2 | 44101 | PIN, COTTER 3/32 X 3/4 | 41 | 1 | 3-344 | OWNERS MANUAL |
| 21 | 1 | 47063 | PIN, COTTER 5/32 X 2.0 | | | | |



Look for this symbol to point out important safety precautions. It means — **ATTENTION!** Become alert! Your safety is involved.




CAUTION: vehicle braking and stability may be affected with the addition of an accessory or an attachment. Be aware of changing conditions on slopes.

SAFETY RULES


Remember, any power equipment can cause injury if operated improperly or if the user does not understand how to operate the equipment. Exercise caution at all times when using power equipment.

- Read the towing vehicle owners manual and towing vehicle safety rules. Know how to operate your tractor before using the broadcast spreader attachment.
- Read the chemical label instructions and cautions for handling and applying the chemicals purchased for spreading.
- Wear eye and hand protection when handling and when applying lawn or garden chemicals.
- Never operate tractor and spreader attachment without wearing substantial footwear, and do not allow anyone to ride or sit on spreader attachment frame.
- Never allow children to operate the tractor or spreader attachment, and do not allow adults to operate without proper instructions.
- Always begin with the transmission in first (low) gear and with the engine at low speed, and gradually increase speed as conditions permit.
- When towing broadcast spreader do not drive too close to a creek or ditch and be alert for holes and other hazards which could cause you to lose control of the broadcast spreader and tractor.
- Before operating vehicle on any grade (hill) refer to the safety rules in the vehicle owner's manual concerning safe operation on slopes. Stay off steep slopes!
- Follow maintenance and lubrication instructions as outlined in this manual.

OPTIONAL ACCESSORIES



69115
Deflector Kit

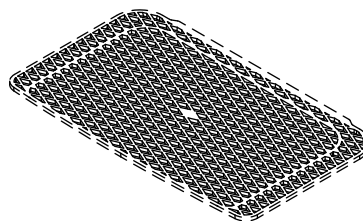

69128
Plastic Grate