
Terraking Blade Marker

Instruction Sheet

Product Description:

TerraKing Heavy-Duty Blade Markers are made from a high-strength cable encased by a high visibility plastic tube topped with a vinyl end-cap. One inch DOT rated reflective safety tape wraps the top end of the marker to increase its visibility in adverse conditions. The markers are supplied with fastening hardware and brackets for additional mounting options.

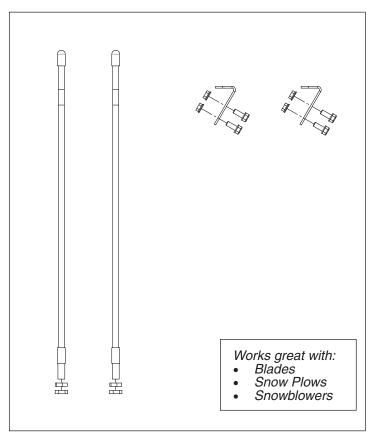

Parts in kit

Qty	Description
2	Blade Maker
2	7/16" - 20 Hex Nut
2	Mount Bracket
4	5/16" - 18 x 3/4" Hex Head Flange Bolt
4	5/16" - 18 Nylock Hex Nut

Instructions

Installation Instructions:

Flat Surface Mounting

- 1. Drill or use a 7/16" diameter hole to mount the blade marker. The center of the hole should be approximately 3/4" to 1" inside of the edge of the blade.
- 2. Thread the standard hex nut all the way on the threaded steel base and insert the remaining threads into the newly drilled hole (blade marker sticking up above the blade). Install the nylock nut to secure the plow marker to the plow and torque to 18 ft.-lbs.

Angled surface mounting

- Use the mount bracket as a template and mark the hole location.
- 2. Use a 5/16" drill bit to drill the marked hole locations.
- 3. Bolt the bracket using the 5/16"-18 x3/4" bolt and 5/16"-18 nylock hex nut. Repeat steps 1-3 for the opposite side mounting location.
- 4. Thread the standard hex nut all the way on the threaded steel base and insert the remaining threads into the newly drilled hole (blade marker sticking up above the blade). Install the nylock nut to secure the plow marker to the plow and torque to 18 ft.-lbs.

Warranty:

Limited Warranty

TerraKing Blade Markers are guaranteed to be free from defects in material and workmanship from the date of purchase for 1 year provided that the purchaser properly assembles, installs, uses and maintains the products in accordance with this manual.

Purchaser's failure to adhere to such requirements will void the warranty. To the extent permitted by applicable law, all other warranties, representations, obligations and conditions, expressed or implied, including but not limited to implied warranties of merchantability, fitness for any particular purpose and non-infringement, are hereby disclaimed and excluded.

Any product which does not meet warranty shall, as purchaser's sole and exclusive remedy, be repaired or replaced by TerraKing. This warranty is non-transferable. In addition, our warranty does not cover:

- Labor charges
- Loss or consequential, incidental or special damages of any kind

TerraKing reserves the right to request photos or return of damaged/defective parts. Please have a copy of the original purchase order, receipt and serial number (if available) to submit the claim. All warranty parts must be supplied by TerraKing. We will not reimburse for parts purchased from other suppliers.

